


# PSC CLEANING SYSTEMS INC.

## INDUSTRIAL-DUTY COLD WATER STATIONARY CLEANING SYSTEMS



S210EA1 - 2.1 GPM @ 1000 PSI

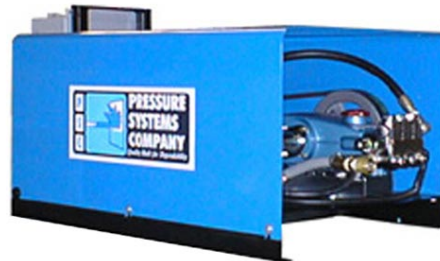

S420EA5-3 - 4 GPM @ 1900 PSI



S950EA5-3 - 9 GPM @ 5000 PSI

### FEATURES:

- UNIQUE, RELIABLE DESIGN - CSA APPROVED
- BELT-DRIVEN, OIL-BATH PLUNGER PUMP WITH THERMO-PROBE PUMP PROTECTION (S210EA, S315EA - DIRECT DRIVE)
- TRIGGER GUN ACTIVATED START/STOP CONTROL CIRCUIT WITH SOLID STATE TIME DELAY SHUTDOWN
- IDEAL CENTRALIZED SYSTEM WITH MULTI STATION OUTLETS

### STANDARD EQUIPMENT:

- 50 FT. HIGH PRESSURE HOSE WITH TRIGGER GUN, VARIABLE PRESSURE WAND AND STAINLESS STEEL NOZZLE\*\*
- DOWNSTREAM CHEMICAL INJECTION\*\*

### COMMON FACTORY ADDED OPTIONS:

- NITROGEN CHARGED PUMP PULSATION DAMPENER
- WALL MOUNTING BRACKETS (INCLUDED WITH S210 & S315)
- CAT PUMP

MODEL	FLOW GPM	PRESSURE PSI	MOTOR H.P.	230V-1 PH	TOTAL 208V-3 PH	AMP 460V-3 PH	575V-3 PH	DIMENSIONS L X W X H (IN.)
S210EA	2.0	1000	1.5	12.1	-	-	-	24/12/14
S315EA	3.0	1500	3	17	-	-	-	24/12/14
S411EA	4.0	1100	3	17	9.8	4.4	3	30/20/16
S420EA	4.0	1900	5	22	14.6	6.6	5	30/20/16
S429EA	4.0	2900	7.5	33	22.5	9.8	7.5	30/20/16
S440EA	4.0	4000	10	-	29	12.5	10	30/20/16
S543EA	5.4	3000	10	-	29	12.5	10	30/20/16
S562EA	5.6	2000	7.5	33	22.5	9.8	7.5	30/20/16
S612EA	6.0	1200	5	22	14.6	6.6	5	30/20/16
S620EA	6.0	2000	7.5	33	22.5	9.8	7.5	30/20/16
S812EA**	8.0	1200	7.5	33	22.5	9.8	7.5	30/20/16
S820EA**	8.0	2000	10	-	29	12.5	10	30/20/16
S830EA**	8.0	3000	15	-	40	18.1	14.5	38/28/19

\*\* SB12, SB20 & SB30 INCLUDE UPSTREAM CHEMICAL INJECTION AND 2 SINGLE LANCE GUN/HOSE ASSEMBLIES FOR MULTI-GUN OPERATION.  
NOTE: IF CAT PUMPS ARE DESIRED, PLEASE CONTACT OUR OFFICES.

CONTACT YOUR DISTRIBUTOR FOR FURTHER INFORMATION AND ASSISTANCE IN DETERMINING THE RIGHT PSC STATIONARY CLEANING SYSTEM FOR YOUR APPLICATION



PHONE: (800) 246-9689 / (905) 761-1733 • FAX: (905) 738-6168

WEBSITE: WWW.PSCCLEAN.COM • EMAIL: INFO@PSCCLEAN.COM

© 2002 PSC CLEANING SYSTEMS INC., ALL RIGHTS RESERVED